

DN 63

Angle Valves (VAH, VAP)

MANUALLY ACTUATED

- Spindle drive with hand wheel
- Smooth opening
- Visual position indicator

PNEUMATICALLY ACTUATED

- Visual indication for open and closed position
- Electrical position indicator for open and closed position
- For system manufacturers without pilot valve



SELECTION DATA

Angle valve		DN 63 ISO-K	DN 63 ISO-K
Housing material	AISI/DIN	aluminum -/3.2373	stainless steel 304/1.4301

ORDERING INFORMATION MANUALLY ACTUATED

Type		VAH063-A	VAH063-X
Angle valve	Part No.	250-470	250-475

SPARE PARTS

Seal set		215-251	215-251
Bellows set for manually actuated valves		215-254	215-254

SPECIFICATIONS MANUALLY ACTUATED

Service life	Mio cycles	1.5	1.5
Conductance for molecular flow	l/s	140	140
Tightness	mbar l/s	1 x 10 ⁻⁹	1 x 10 ⁻⁹
Pressure absolute, min. / max.	mbar / bar	10 ⁻⁸ / 1,5	10 ⁻⁸ / 1,5
Pressure resistance	bar (abs.)	4	4
Differential pressure in closing / opening direction	bar	1.5 / 1.5	1.5 / 1.5
Opens to a pressure difference of	bar	1.5	1.5
Ambient temperature	°C	5 – 60	5 – 60
Mounting orientation		any	any
Seals		FPM	FPM
Weight	kg	3.6	6.5

SELECTION DATA

Angle valve		DN 63 ISO-K	DN 63 ISO-K
Housing material	AISI/DIN	aluminum —/3.2373	stainless steel 304/1.4301

ORDERING INFORMATION PNEUMATICALLY ACTUATED

Type		VAP063-A	VAP063-X
Angle valve w/o pilot valve, with position indicator		250-404	250-414
Valve with pilot valve, with position indicator			
24 V DC	Part No.	250-400	250-410
24 V AC	Part No.	250-401	250-411
100 – 115 V AC	Part No.	250-402	250-412
200 – 240 V AC	Part No.	250-403	250-413


SPARE PARTS

Seal set	215-521	215-251
Bellows set for pneumatically actuated valves	215-253	215-253


SPECIFICATIONS PNEUMATICALLY ACTUATED

Service life	Mio cycles	1.5	1.5
Conductance for molecular flow	l/s	140	140
Tightness	mbar l/s	1 x 10 ⁻⁹	1 x 10 ⁻⁹
Pressure, absolut, min. / max.	mbar / bar	10 ⁻⁸ / 1,5	10 ⁻⁸ / 1,5
Pressure resistance	bar (abs.)	4	4
Differential pressure in closing / opening direction	bar	1.5 / 1.5	1.5 / 1.5
Opens to a pressure difference of	bar	1.5	1.5
Ambient temperature	°C	5 – 60	5 – 60
Switching frequency	1/min	60	60
Closing time	ms	300	300
Opening time	ms	300	300
Electrical position indicator load capacity	VAC / A	250 / 0.125	250 / 0.125
	VDC / A	50 / 0.25	50 / 0.25
Compressed air, overpressure	bar	4 – 8	4 – 8
Air cylinder volume	cm ³	75	75
Mounting orientation		any	any
Seals		FPM	FPM
Weight	kg	4.0	6.8

DIMENSIONS MANUALLY ACTUATED

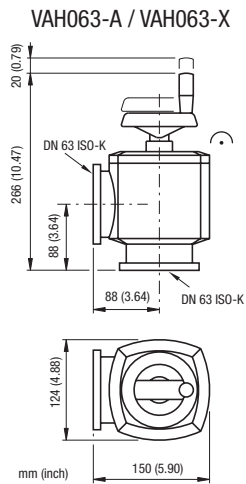

DIMENSIONS PNEUMATICALLY ACTUATED

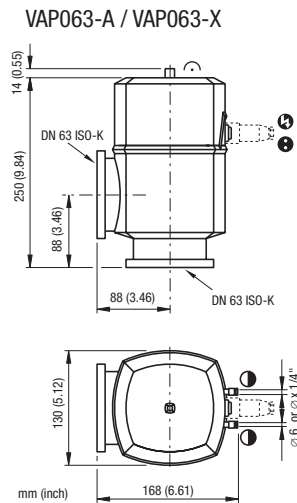

Angle valve with and without pilot valve,
with position indicator



GLOBAL HEADQUARTERS:

Two Technology Place, East Syracuse, NY 13057 USA
Tel: +1.315.434.1100 Fax: +1.315.437.3803 E-mail: reachus@inficon.com

UNITED STATES FRANCE GERMANY LIECHTENSTEIN SWITZERLAND UNITED KINGDOM CHINA JAPAN KOREA SINGAPORE TAIWAN

Visit our website for contact information and other sales offices worldwide. www.inficon.com
Due to our continuing program of product improvements, specifications are subject to change without notice.
siba15e1 (2004-05) ©2003 INFICON Inc.