



CDG025D, CDG025D-S

SKY® Capacitance Diaphragm Gauges

The INFICON SKY CDG025D Capacitance Diaphragm Gauge line of highly accurate temperature compensated manometers is designed for stable performance in harsh manufacturing tool environments. Advanced digital electronics improve gauge performance and offer easy handling features such as one pushbutton zero function and setpoint adjustment. The corrosion resistant ultra pure ceramic sensor provides excellent zero stability with a long life expectancy of several million pressure cycles, including atmospheric bursts. A unique sensor shielding (patent pending) protects the gauge from process contamination. A robust mechanical design and digital electronics improve EMC compatibility, long term stability and temperature compensation. The CDG025D sets new standards for fast stability after power on and fast recovery from atmospheric pressure exposure.



ADVANTAGES

- Full scale ranges from 100 mTorr ... 1000 Torr
- Fast stability after power on
- Fast recovery from atmospheric pressure
- Corrosion resistant ceramic sensor
- Excellent long term signal stability
- Temperature compensated
- Sensor protected from contamination
- One pushbutton zero function
- Wide range power supply
- 2 setpoints (optional)
- RS232 interface (optional)

APPLICATIONS

Accurate and fast pressure measurement for demanding applications:

- Semiconductor manufacturing equipment for Etch, CVD, PVD, ALD
- Data storage and display manufacturing equipment
- Industrial vacuum equipment
- General high accuracy pressure measurement

ORDERING INFORMATION

CDG025D, temperature compensated

Full Scale Range			Flange type			
Torr	Pascal	mbar	1/2" tube	DN 16 ISO-KF	DN 16 CF-R	8 VCR®
1000	133'322	1333	375-000	375-001	375-002	375-003
100	13'332	133	376-000	376-001	376-002	376-003
10	1'333	13.3	377-000	377-001	377-002	377-003
1	133	1.3	378-000	378-001	378-002	378-003
0.1	13.3	0.13	379-000	379-001	379-002	379-003

CDG025D, with 2 setpoints and RS232 interface, temperature compensated

Full Scale Range			Flange type			
Torr	Pascal	mbar	1/2" tube	DN 16 ISO-KF	DN 16 CF-R	8 VCR®
1000	133'322	1333	375-300	375-301	375-302	375-303
–	110'000	1'100	375-500	375-501	375-502	375-503
200	26'664	267	382-300	382-301	382-302	382-303
100	13'332	133	376-300	376-301	376-302	376-303
–	10'000	100	376-500	376-501	376-502	376-503
20	2'666	26.7	383-300	383-301	383-302	383-303
10	1'333	13.3	377-300	377-301	377-302	377-303
–	1'000	10	377-500	377-501	377-502	377-503
1	133	1.3	378-300	378-301	378-302	378-303
–	100	1	378-500	378-501	378-502	378-503
0.25	33.3	0.33	385-300	385-301	385-302	385-303
0.1	13.3	0.13	379-300	379-301	379-302	379-303
–	10	0.1	379-500	379-501	379-502	379-503

bold = standard products

Other flange types and full scale ranges on request.

SPECIFICATIONS (standard products)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133'322 1333	100 13'332 133	10 1'333 13.3	1 133 1.3	0.1 13 0.13
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.5
Temperature effect on zero	% F.S./°C	0.005	0.005	0.005	0.015	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.03
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260	130
Lowest reading	% F.S.	0.01				
Lowest suggested reading	% F.S.	0.05				
Lowest suggested control pressure	% F.S.	0.5				
Temperature Operation (ambient)	°C	+5 ... +50				
Bakeout (at flange) ²⁾	°C	≤110				
Storage	°C	-40 ... +65				
Supply voltage	VDC	14 ... 30				
Power consumption	W	≤1				
Output signal (analog)	VDC	0 ... +10				
Response time	ms	30				
Degree of protection		IP 30				
Standards		EN 61000-6-2, EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, RoHS				
Electrical connection		D-sub, 15 pole, male				
Setpoint ³⁾		two setpoints (SP1, SP2)				
Relay contact	VDC / ADC	30 / ≤0.5				
Hysteresis	% F.S.	1				
Materials exposed to vacuum		Aluminum oxide ceramic (Al ₂ O ₃), Vacon 70 ⁴⁾ , stainless steel (AISI 316L ⁵⁾ , AgCuTi hard solder, sealing glass				

¹⁾ Non-linearity, hysteresis, repeatability at 25 °C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Non Operation.

³⁾ CDG025D-S only.

⁴⁾ 28% Ni, 23% Co, 49% Fe

⁵⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe


SPECIFICATIONS (other ranges)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	- 110'000 1000	200 26'664 267	- 10'000 100	20 2'666 26.7	- 1'000 10	- 100 1	0.25 33.3 0.33	- 10 0.1
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.2	0.2	0.25	0.5
Temperature effect on zero	% F.S./°C	0.005	0.005	0.005	0.005	0.005	0.015	0.02	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.03
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260	260	260	130	130

Further specifications see table above.

DIMENSIONS, INTERNAL VOLUME, WEIGHT

mm (inch)

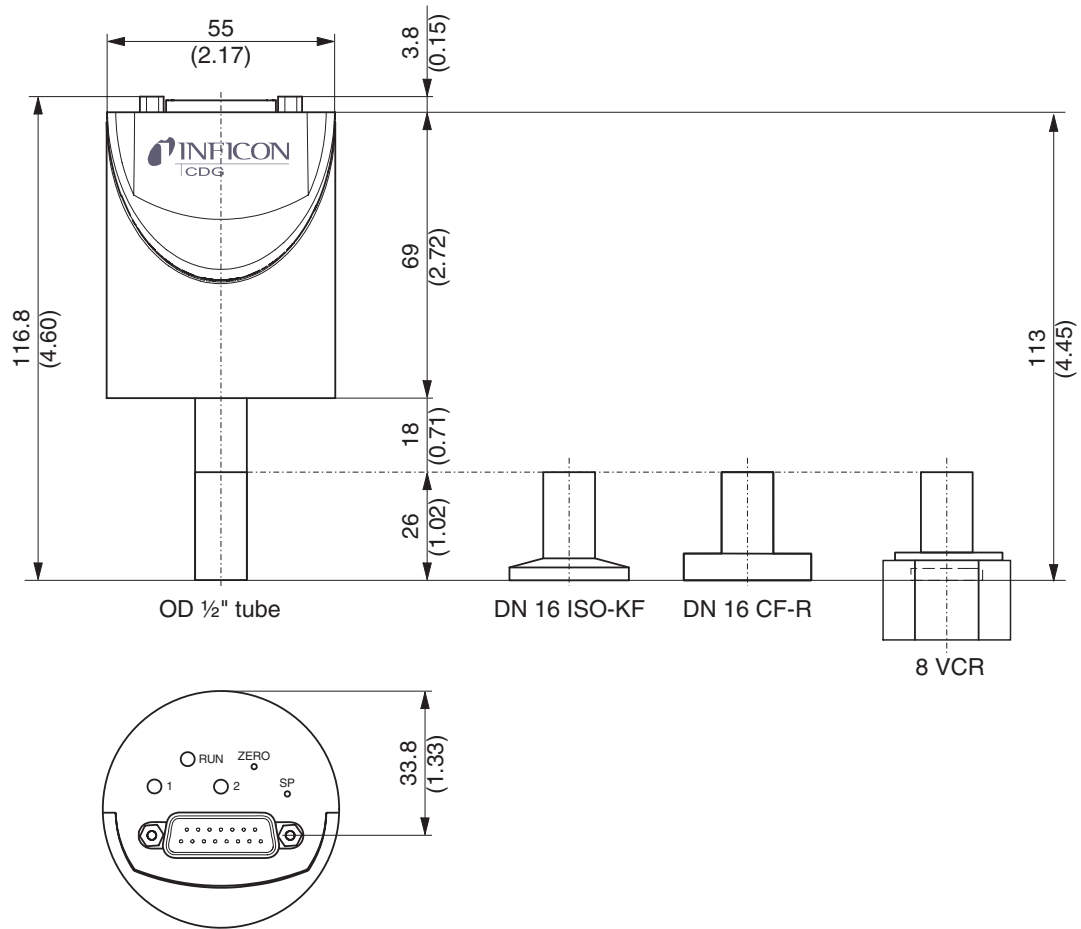

		1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm ³ (inch ³)	3.6 (0.22)	3.6 (0.22)	3.6 (0.22)	3.6 (0.22)
Weight	g	260	270	280	290

INFICON Instruments for Intelligent Control™

GLOBAL HEADQUARTERS:

Two Technology Place, East Syracuse, NY 13057 USA
 Tel: +1.315.434.1100 Fax: +1.315.437.3803 E-mail: reachus@inficon.com

UNITED STATES FRANCE GERMANY LIECHTENSTEIN SWITZERLAND UNITED KINGDOM CHINA JAPAN KOREA SINGAPORE TAIWAN

Visit our website for contact information and other sales offices worldwide. www.inficon.com
 Due to our continuing program of product improvements, specifications are subject to change without notice.
 tiba33e1-d (2008-05) ©2008 INFICON