


CDG160D, CDG200D

SKY® Capacitance Diaphragm Gauges

INFICON SKY CDG160D and CDG200D high temperature manometers are your best choice for accurate total pressure measurement and control. CDG160D and CDG200D gauges are temperature controlled at 160 °C respectively 200 °C for superior performance in demanding semiconductor and plasma processes. They are available for full scale ranges from 1 Torr to 1000 Torr, with all common flange types and fieldbus interfaces and provide a linear 0 to 10 V, gas type independent, pressure signal. INFICON capacitance manometers use an ultra pure alumina ceramic diaphragm which is corrosion proof. The advantages of the ceramic sensor are better signal stability, faster recovery from atmosphere, short warm up time and an extraordinary lifetime. INFICON CDG are high quality, cost effective pressure sensors for demanding semiconductor, plasma and vacuum applications.

ADVANTAGES

- Lower CoO (cost of ownership), 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Diagnostic port for quick service and maintenance
- Two year warranty, longer life time with  heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Compliance & standards: CE, EN, UL, SEMI, RoHS


APPLICATIONS

- Etch, PVD, CVD, LPCVD and other semiconductor production processes
- Chemical and corrosive high temperature processes
- General thin film and vacuum processes requiring gauge protection



New
200 °C sensor

ORDERING INFORMATION CDG160D, CDG200D

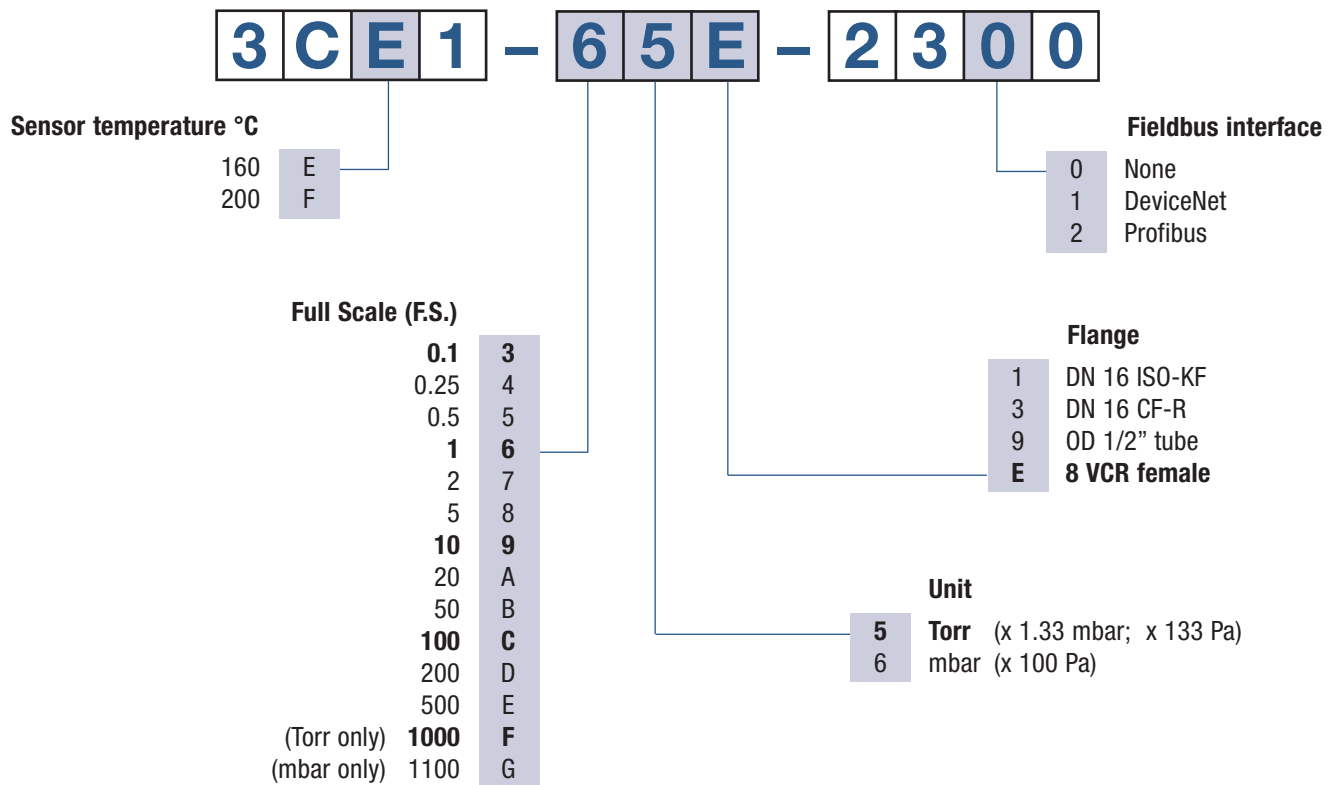

bold = standard products

Other flange types and full scale ranges (F.S.) on request.

ACCESSORIES

Diagnostic

Communication adapter (2 m) for PC RS232 serial port

303-333

Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

SPECIFICATIONS (Torr based standard products)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133'322 1333	100 13'332 133	10 1'333 13.3	1 133 1.3
Accuracy ¹⁾	% of reading	0.4			
Temperature effect on zero	% F.S./°C	0.005			
on span	% of reading/°C	0.02			
Pressure, max.	kPa (absolute)	400	260		
Resolution	% F.S.	0.003			
Lowest reading	% F.S.	0.01			
Lowest suggested reading	% F.S.	0.05			
Lowest suggested control pressure	% F.S.	0.5			
Temperature Operation (ambient)	°C	+10 ... +50			
Bakeout at flange	°C	≤200			
Storage	°C	-40 ... +65			
Supply voltage		+21 ... +30 VDC or ±15 V (±5%)			
Power consumption during heat up CDG160D	W	≤18			
CDG200D	W	≤25			
Power consumption at operating temperature CDG160D	W	≤12			
CDG200D	W	≤18			
Output signal (analog)	VDC	0 ... +10			
Response time	ms	30			
Degree of protection		IP 40			
Standards		EN 61000-6-2, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, SEMI S-2			
Electrical connection		D-sub, 15 pole, male			
Setpoint Relay contact	VDC / ADC	two setpoints (SP1, SP2)			
Hysteresis	% F.S.	≤30 / ≤0.5			
		1			
Diagnostic port Protocol		RS232-C			
Read		pressure, status, ID,			
Set		set points, filter, zero adjust, factory reset, DC offset			
Materials exposed to vacuum		Aluminum oxide ceramic (Al ₂ O ₃), stainless steel (AISI 316L ²⁾ , Nickel, sealing glass			

¹⁾ Non-linearity, hysteresis, repeatability at 25 °C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

SPECIFICATIONS (Torr based other ranges)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	500 66'661 666.61	200 26'664 267	50 6'666.1 66.67	20 2'666 26.7	5 666.61 6.6661	2 266.66 2.67
Accuracy ¹⁾	% of reading	0.4					
Temperature effect on zero	% F.S./°C	0.005					
on span	% of reading/°C	0.02					
Pressure, max.	kPa (absolute)	400	260				
Resolution	% F.S.	0.003					

Further specifications see table above.

SPECIFICATIONS (mbar based products)

Measurement Range F.S. (Full Scale)	mbar Pa	1100 110'000	100 10'000	10 1'000	1 100
Accuracy ¹⁾	% of reading	0.4			
Temperature effect on zero on span	% F.S./°C	0.005			
	% of reading/°C	0.02			
Pressure, max.	kPa (absolute)	400	260		
Resolution	% F.S.	0.003			

Further specifications see table «SPECIFICATIONS (Torr based standard products)».

SPECIFICATIONS (DeviceNet™)


			CDG160D, CDG200D DeviceNet™
Protocol			DeviceNet™, group 2 slave only
Data rate	kBaud	125, 250, 500 by switch or network programmable	
Cable length	125 kbps	m (ft)	500 (1650)
	250 kbps	m (ft)	250 (825)
	500 kbps	m (ft)	100 (330)
MAC ID	address 00 - 63 by switch or network programmable		
Digital functions	read	pressure, status, ID	
	set	set points, filter, zero adjust, factory reset, DC offset	
Specification	DeviceNet™ "Vacuum Gauge Device Profile" (ODVA)		
Device type	"VG" vacuum gauge		
I / O slave messaging	polling only		
Supply voltage for gauge at D-sub connector	+14 ... +30 VDC or ±15 V / ≤12 W		
Supply voltage for DeviceNet transceiver at microstyle connector	24 V nom / <2 W (11 ... 25 V)		
Connector for DeviceNet™	microstyle, 5 pin		
Connector for CDG (analog output, supply voltage CDG, setpoints)	D-sub, 15 pin, male		

SPECIFICATIONS (Profibus DP)

			CDG160D, CDG200D Profibus DP
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500	
	MBaud	1.5 / 12	
Address	address 00 - 125 by switch or network programmable		
Digital functions	read	pressure, status, ID	
	set	set points, filter, zero adjust, factory reset, DC offset	
Connector for Profibus DP	D-sub, 9 pin, female		
Connector for CDG (analog output, supply voltage, setpoints)	D-sub, 15 pin, male		

DIMENSIONS, INTERNAL VOLUME, WEIGHT

mm (inch)

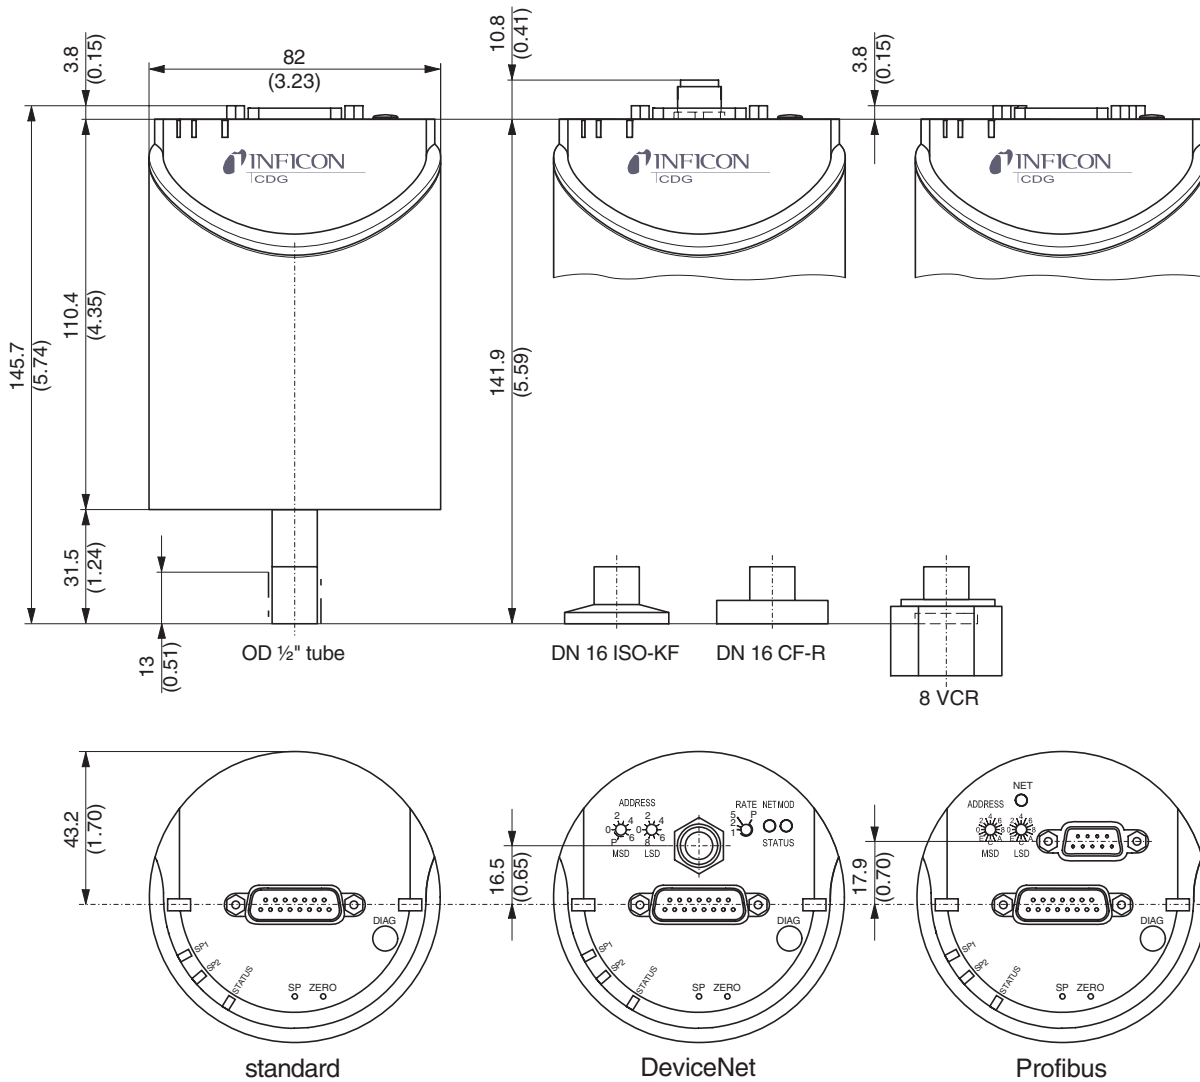

		1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm ³ (inch ³)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)
Weight	g	837	852	875	897



GLOBAL HEADQUARTERS:

Two Technology Place, East Syracuse, NY 13057 USA
 Tel: +1.315.434.1100 Fax: +1.315.437.3803 E-mail: reachus@inficon.com

UNITED STATES FRANCE GERMANY LIECHTENSTEIN SWITZERLAND UNITED KINGDOM CHINA JAPAN KOREA SINGAPORE TAIWAN

Visit our website for contact information and other sales offices worldwide. www.inficon.com
 Due to our continuing program of product improvements, specifications are subject to change without notice.
 tiba36e1 (2008-04) ©2008 INFICON