


QUICK START GUIDE


How to set the Threshold Alarm at 100ppm on your IRwin Methane Leak Detector

1 Press Tollowed by	
2 Use \checkmark to navigate to <i>Thresholds</i> and press \oslash	FUNCTION TEST GENERAL THRESHOLDS DATA OUTPUT CALIBRATION PASSWORD IR ETHANE ANALYSIS AUTO BAR HOLE Settings
3 To select <i>CxHy</i> press ⊘	CxHy Safety xTEL ppm AL1 AL2 AL3 CH= 50 10 50 100 C C=H= 10 50 100 C C H+0 10 S0 100 C C=H= 10 50 100 C H+0 10 S0 100 C C=H= 10 50 100 C H+0 H
4 If prompted, enter the Intermediate password code and repeat step 3. If not prompted, go ahead to the next step	



6

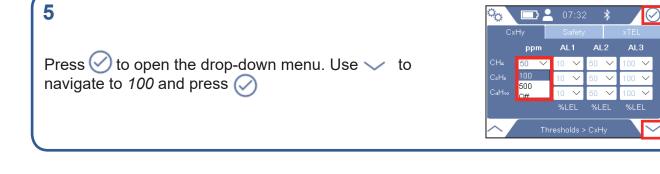





www.inficon.com reach.sweden@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice All trademarks are the property of their respective owners. ©2019 INFICON mimk66en1-01 (1906)