

FLUE-Mate®

COMBUSTION ANALYZER

Optimize your combustion efficiency.

FLUE-Mate is the all-in-one combustion analyzer built to improve your combustion efficiency and safety. In addition to combustion analysis, this tool is also equipped with an integrated manometer, thermometer, ambient CO test, cracked heat exchanger test and provides draft analysis. FLUE-Mate features intuitive mode selection and navigation, 15 programmable fuel selections and a field-replaceable O₂ sensor, probe and water trap to minimize downtime. Download the FLUE-Mate app to generate quick analysis reports on your smart phone or tablet. FLUE-Mate is the user-friendly, comprehensive combustion analyzer for all your heating jobs.

ADVANTAGES


- Easy-to-read backlit LCD display
- Displays efficiency, O₂, CO₂, CO and flue gas temperature readings all on one screen
- Field-replaceable O₂ sensor to minimize downtime
- Automatic CO sensor protection
- FLUE-Mate app allows you to store and email reports
- Monitor system pressures with built-in manometer and hose kit
- External water trap prevents internal electronic and sensor damage
- Optional Bluetooth® printer
- Upgradeable to measure NOx



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play is a trademark of Google LLC.




LEARN MORE HERE!

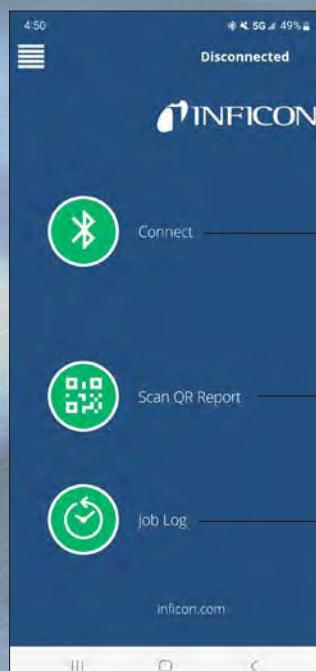

Connect for real-time readings

Scan QR code for a full report

View, edit, and share reports

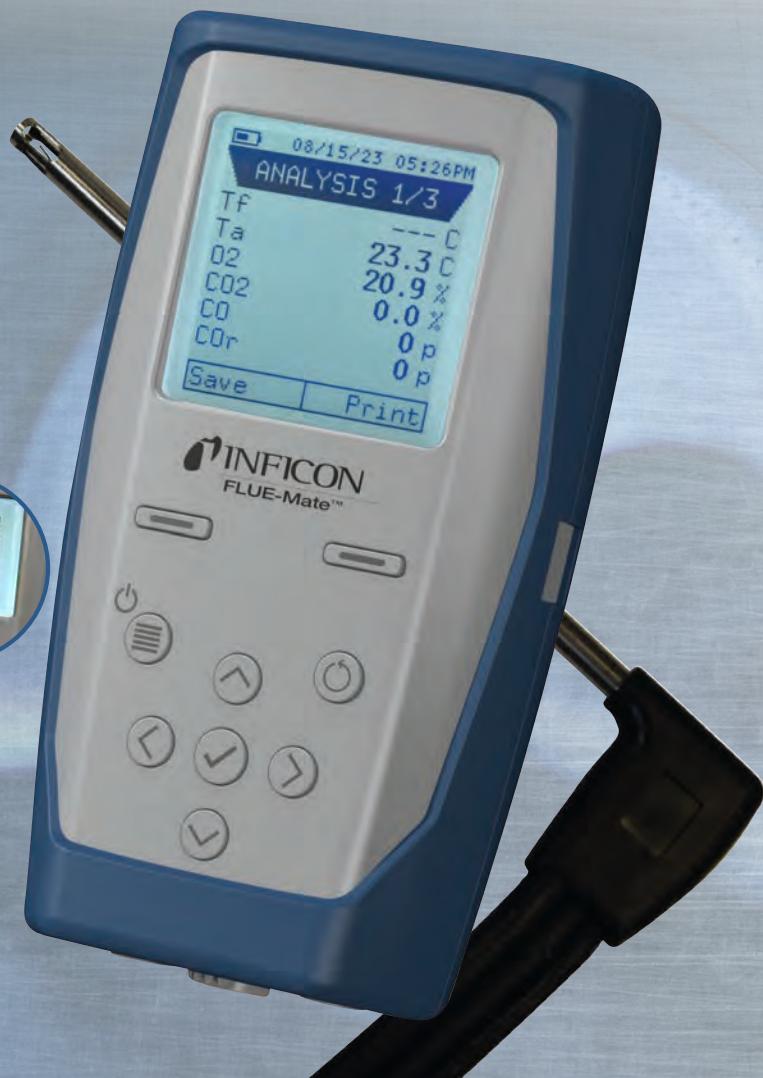

SPECIFICATIONS

Includes	FLUE-Mate Flue gas probe with 1.5 m (5 ft.) dual hose Manometer pressure hose Water trap AC wall charger Carrying case			
Power source	Lithium ion battery (rechargeable)			
Battery life	8 hours			
Weight	349 g (0.77 lb.)			
Warranty	Two-year			
Compatible fuels	Natural gas, Propane, Butane, Diesel oil, Fuel oil, Propane air, Biogas, Pellets 8%, Wood 20%, Wood chips, Coal, Olive pits, CO off-gas, Rice husk basmati			
Measured	Range	Resolution	Accuracy	
O ₂	0 - 25.0% vol	0.1% vol	±0.2% vol	
CO high immunity H ₂ with NO _x filter	0 - 4000 ppm	1 ppm	±20 ppm ±5% measured value	0 - 400 ppm 401 - 4000 ppm
Air temperature	-20.0 - 120.0°C -4.0 - 248.0°F	0.1°C 0.2°F	±1°C ±1.8°F	
Flue gas temperature	-20.0 - 800.0°C -4.0 - 1472.0°F	0.1°C 0.2°F	±1°C (1.8°F±) ±1% measured value	-20-100°C (-4 - 212°F) 101-800°C (212.2 - 1472°F)
Pressure (draft & differential)	-99.5 - 199.1 mbar	0.01 mbar	±1% measured value ±0.02 mbar ±1% measured value	-99.5 - -2.0 mbar -2.0 - ± 2.0 mbar +2.0 mbar - 199.1 mbar
Calculated				
CO ₂	0 - 99.9% vol	0.1% vol		
Temperature differential	0 - 800.0°C 32.0 - 1472.0°F	0.1°C 0.2°F		
Air index	0.00 - 9.50	0.01		
Excess air	0 - 850%	1%		
Stack losses	0.0 - 100.0%	0.1%		
Efficiency	0.0 - 120.0%	0.1%		

ORDERING INFORMATION

FLUE-Mate Combustion Analyzer	502-202-G11
FLUE-Mate Combustion Analyzer with Bluetooth® printer	502-203-G11

Accessories and Replacement Parts

Bluetooth® printer	502-600-P1
O ₂ Sensor	502-601-P1
Wall charger (US and International)	502-602-P1
Replacement filters (5 pack)	502-603-P1
Replacement printer paper rolls (5 pack)	502-604-P1
USB cable for charger	502-605-P1
Water trap filter assembly	502-606-P1
Carrying case	502-607-P1
Positioning cone for probe	502-608-P1
Replacement o-rings for water trap (5 pack)	502-609-P1
Flue gas probe with 1.5 m (5 ft) dual hose	502-610-P1
Pressure hose kit for use with manometer	502-611-P1
Lithium ion battery	502-612-P1
Test port plugs	502-613-P1

