

O-Ring

INFICON ISO-F quality fittings are manufactured according to ISO 1609, DIN 28404 and Pneurop 6606. Our quality large diameter fittings are the standard vacuum components for all vacuum and high vacuum lines. The high quality INFICON fittings are designed and tested for leak rates less than 1×10^{-9} mbar l/s.



BENEFITS

- Competitively priced
- World wide logistics
- 2011/65/EU RoHS compliant

ORDER INFORMATION

Type	DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 250 ISO-F	DN 320 ISO-F	DN 500 ISO-F
O-ring, CR60, $\varnothing 1023 \times 8$						
O-ring, CR60, $\varnothing 110 \times 5$, 5 piece		212-346				
O-ring, CR60, $\varnothing 165 \times 5$, 5 piece			212-347			
O-ring, CR60, $\varnothing 265 \times 5$, 5 piece				212-349		
O-ring, CR60, $\varnothing 325 \times 8$					212-338	
O-ring, CR60, $\varnothing 510 \times 8$						212-340
O-ring, CR60, $\varnothing 640 \times 8$						
O-ring, CR60, $\varnothing 80 \times 5$, 5 piece	212-345					
O-ring, CR60, $\varnothing 820 \times 8$						

DN 630 ISO- F	DN 800 ISO- F	DN 1000 ISO-F
<hr/>		
212-343		


212-341

212-342

SPECIFICATIONS

Type	DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 250 ISO-F	DN 320 ISO-F	DN 500 ISO-F
Dimension A	80	110	165	265	325	510
Dimension B	5	5	5	5	8	8
Seal:	CR	CR	CR	CR	CR	CR
Set of:	5 pcs.	5 pcs.	5 pcs.	5 pcs.		

DIMENSIONS

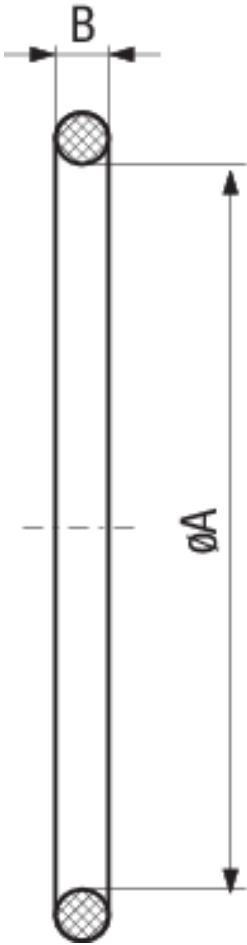

SPECIFICATIONS

Type	DN 630 ISO- F	DN 800 ISO- F	DN 1000 ISO-F
Dimension A	640	820	1023
Dimension B	8	8	8
Seal:	CR	CR	CR
Set of:			



www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON