
GAS-Mate®


COMBUSTIBLE GAS LEAK DETECTOR

Safely detect combustible gas and flammable refrigerant leaks.

GAS-Mate is an intrinsically safe combustible gas leak detector



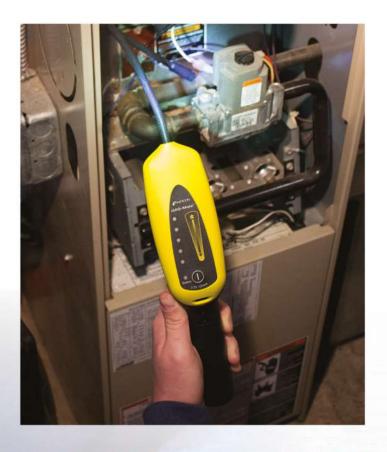

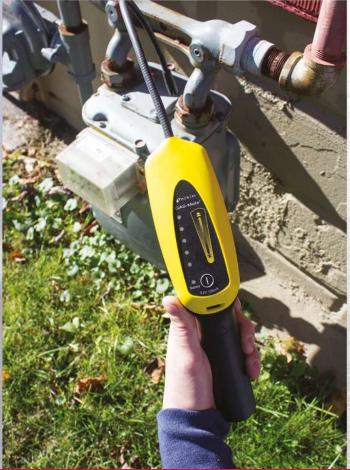

SPECIFICATIONS		
Includes	GAS-Mate Combustible gas sensor Two D-size alkaline batteries Carrying case	
Compatible refrigerants	Propane (R290), isobutane (R600a), R441a, hydrogen forming gas (95/5), natural gas, methane, ammonia, and more	
Sensitivity	5 ppm for methane, propane (R290), isobutane (R600a), and hydrogen 1 ppm for gasoline	
Power source	Two D-size alkaline batteries (use Duracell® MN1300 to maintain intrinsically safe approval)	
Battery life	25 hours	
Weight	700 g	
Certifications	CE Intrinsically safe for Class I, Division I, Groups A - D, T4 and II 3G Ex nA nL IIC T4 X as per MET Laboratories Listing #E112145	
Probe length	38 cm	
Warranty	Three-year	

ORDERING INFORMATION		
GAS-Mate	718-202-G11	
Accessories and Replacement Parts		
Sensor	706-700-G1	- 11
Carrying case	705-700-G1	

ADVANTAGES

- Detects natural gas, propane, isobutane, ammonia, hydrogen forming gas (95/5), and more
- Ultimate sensitivity of 5 ppm for methane, R290 (propane), and R600a (isobutane)
- Intrinsically safe for use in combustive/ explosive environments
- Great for flammable refrigerants like R290, R600a, and R441a
- Runs on two D-cell batteries



WATCH OUR VIDEO!